

Power plug - BL2-2,54/16-ST - 2896335


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power connector for DIN rail bus connector with 16 free cable ends with a cross section of 0.25 mm², 500 mm long, female contacts

RoHS

Key Commercial Data

Packing unit	50 STK
GTIN	 4 046356 098410
GTIN	4046356098410

Technical data

General

Housing type	Component housing
Housing material	Polyamide

Technical data

Connection in acc. with standard	CUL
Nominal voltage U _N	60 V
Nominal current I _N	2 A
Indicator1	CUL1

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Power plug - BL2-2,54/16-ST - 2896335

Circuit diagram

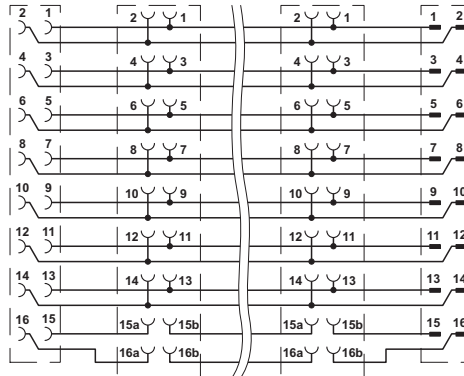

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 118976
Nominal voltage UN		30 V	
Nominal current IN		2 A	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 118976
Nominal voltage UN		30 V	
Nominal current IN		2 A	

EAC		B.01742
-----	--	---------

Power plug - BL2-2,54/16-ST - 2896335

Approvals

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>