

0.276 ±0.006 $[7 \pm 0.15]$ 3 0.197 ± 0.006 [5 ±0.15] 2


Recommended Land Pattern



PIN	FUNCTION
1	TRI-STATE or NC
2	GND
3	Output
4	VDD

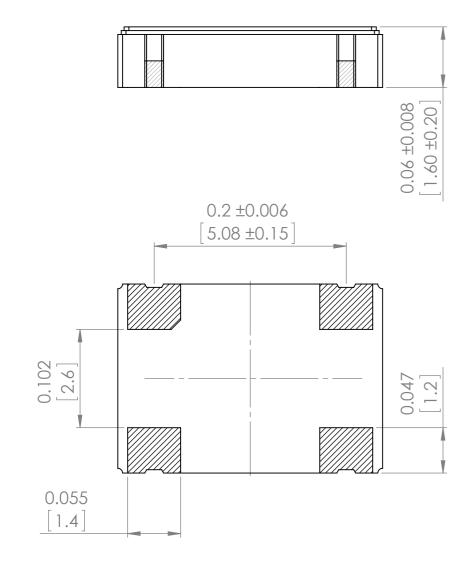

Note: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and 4.

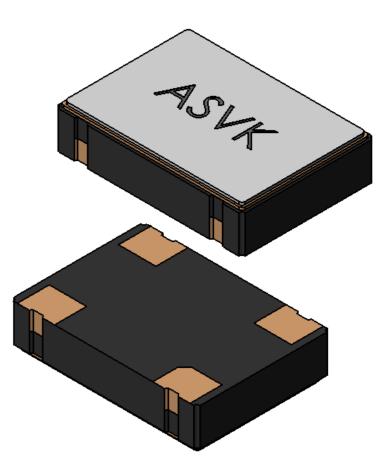

UNLESS OTHERWISE SPECIFIED: FINISH: DIMENSIONS ARE IN INCH(MM)					DEBUR AND BREAK SHARP	DO NOT SCALE DRAWING REVISION			-				
SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:						EDGES	ABRACON						
	NAME	SIGN	ATURE	DATE						CORPORA	TION		
DRAWN	SAAZVAT							20222 Egneranza, Banaha Conta margarita, California 02600					
CHK'D	XXXXXX							30332 Esperanza, Rancho Santa margarita, California 92688					
APPV'D								TITLE:	Oscillo	ntor.			
MFG									Oscillo	וטוג			
Q.A					MATERIAL	:		DWG NO.		/ <i>V</i>	A3		
					1			ASVK					
					WEIGHT:			SCALE:10:1		SHEET 1 OF 1			