


FLKM 14-PA/GE/DO

Order No.: 2290009

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2290009>VARIOFACE front adapter, for GE-FANUC series 90-30, 2 x 8
channels can be connected, digital output**Commercial data**

GTIN (EAN)	 4 017918 057909
Note	Made-to-order
sales group	I607
Pack	2 pcs.
Customs tariff	85366990
Catalog page information	Page 201 (IF-2009)

Product notesWEEE/RoHS-compliant since:
08/03/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General**

Nominal voltage U_N	< 50 V AC 60 V DC
Channels which can be connected	16
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13

Number of plug connectors	2
No. of positions, plug connector	14
Number of positions	14
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	1 A (per path)
	4 A (per connection, supply via separate power supply)
Max. permissible total current	3 A (Per Byte, for supply via connector)
Pollution degree	2
Surge voltage category	II
Supported controller	GE-FANUC 90-30
Supported I/O card	IC693 MDL732
	IC693 MDL733
	IC693 MDL740
	IC693 MDL741
	IC693 MDL742
	IC693 ALG220
	IC693 ALG221
	IC693 ALG222
	IC693 ALG223
	IC693 ALG390
	IC693 ALG391
	IC693 ALG392
	IC693 ALG442

Certificates / Approvals




Certification

CUL, GOST, UL

Diagrams/Drawings

Circuit diagram

Connection scheme FLKM 14-PA/GE/DO

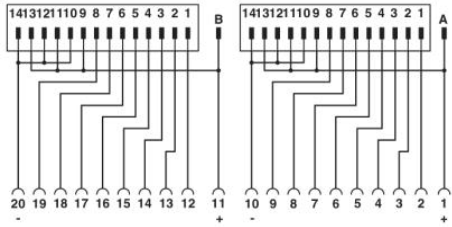

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;