Triple-band (900MHz, 2.45GHz) Wi-Fi Antenna




Offering greater power efficiency and longer-range connectivity to Wi-Fi Certified products, triple-band ceramic antenna enables multi-vendor operability and easy setup for IoT and M2M applications



Features and Benefits

Triple-band Wi-Fi Ceramic Antennas (Series 201932)

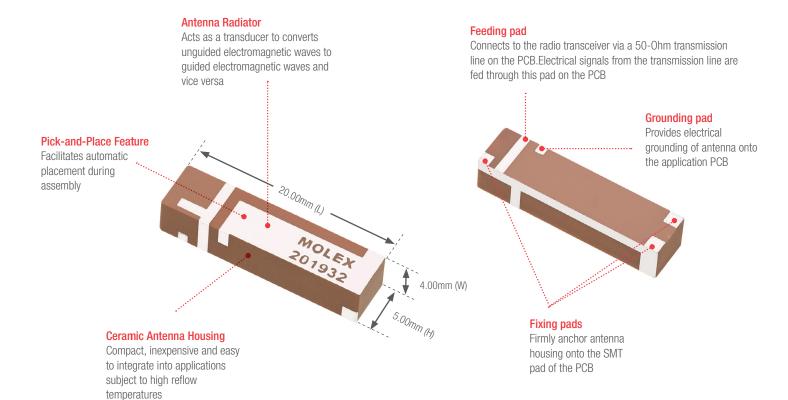

Applications

Consumer

Smart Homes

IoT

Automotive

Connected Vehicle

Industrial

Smart Cities







Internet of Things (IoT)

Triple-band (900MHz, 2.45GHz) Wi-Fi Antenna



Specifications

REFERENCE INFORMATION

Packaging:

Use with: Wi-Fi HaLow-technology devices

Designed In: Millimeters

RoHS: Yes Halogen Free: Yes Glow Wire Compliant: No

ELECTRICAL

Frequency Range: 900 to 924MHz, 2.4 to 2.5GHz, 5.15 to 5.85GHz

Return Loss: < -5, -6 and -5dB respectively Average Total Radiation Efficiency (%): >40%, >65%, >55% respectively

Peak Gain (dBi): 0.7, 4.2, 4.5dBi respectively

Input Impedance (ohms): 50

MECHANICAL

Tape Test: Acceptance <10% peeling off

PHYSICAL

Material: Ceramic

Plating: Silver (Ag) 11±4microns Operating Temperature: -40 to 125°C

Ordering Information

Series No.	Substrate	Mounting	Dimensions (mm)
<u>201932</u>	Ceramic	SMT	20.00 (L) by 4.00 (W) by 5.00 (H) mm